capsul

# PB3300 Printer

Wi-Fi Setup Guide

## CONNECT YOUR PRINTER TO WI-FI

### HOW IT WORKS

The printer sends out its own Wi-Fi network. › You join that network from your phone and open the setup page. › On that page, you connect the printer to your Wi-Fi.

### BEFORE YOU START


- Turn the printer on and load paper. Its Wi-Fi turns on by itself.
- Have a phone, tablet, or laptop with Wi-Fi and a web browser.
- Have your Wi-Fi network name and password ready.

## 1 Find the printer's network name

a. Hold the **Cancel** button for 3 seconds. The printer prints a usage report.

b. On the report, find the **AP Mode SSID**. It looks like **PRT-3A71C2**.

Write the network name here

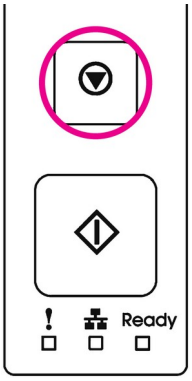



Hold Cancel for 3 seconds

## 2 Connect your phone to the printer

a. On your phone, open **Settings** › **Wi-Fi**.

b. Choose the printer's network from step 1.

c. Your phone may warn that this network has no internet connection. That's expected, so stay connected.

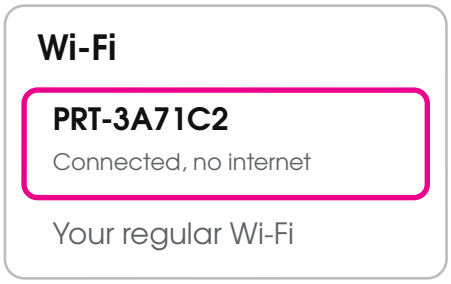



Example. Your phone's screen will look different.

## 3 Open the printer's setup page

a. On the same phone, open a web browser such as Safari, Chrome, or Edge.

b. Type **192.168.200.1** in the address bar and tap **Go**.

**192.168.200.1**




What it looks like on a phone

**Next:** turn over to finish setup

Help and downloads: **capsuloffice.com/support**

capsul

# PB3300 Printer

Wi-Fi Setup Guide

FINISH ON THE SETUP PAGE


## 4 Open the Wi-Fi settings

a. On the setup page, select **Network**, then **Wi-Fi Settings**.

b. Select **Search AP** to list the Wi-Fi networks nearby.




Network › Wi-Fi Settings

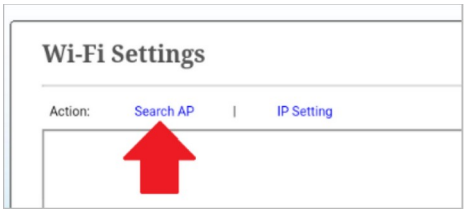


Search AP


## 5 Choose your network

a. Select your Wi-Fi network in the list.

b. Enter your Wi-Fi password and select **Connect**.




Select your network

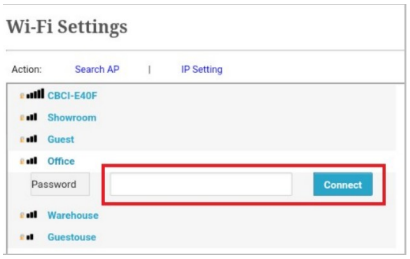


Enter the password, then Connect

## 6 Finish up

a. The page tells you the wired network will be disabled. That's normal.

b. Reconnect your phone to your usual Wi-Fi network.

c. To find the printer's new IP address, hold **Cancel** for 3 seconds and look for **Wi-Fi IP** on the report.

> The wired network connection will be disabled in a second. Please check the available IP on the machine.

The message you will see on the setup page

Write your printer's IP address here

## If something goes wrong

**No usage report prints**
Make sure paper is loaded and the Ready light is on, then hold Cancel for a full 3 seconds.

**I can't find the printer's network on my phone**
Make sure the printer is on, then check the name on the usage report again.

**The setup page won't open**
Check that your phone is still on the printer's network. Type 192.168.200.1 in the address bar, not a search box.

**My phone says "No internet connection"**
That's expected while your phone is connected to the printer. Stay connected until you finish step 5.

**The Wi-Fi connection is weak or drops**
Keep walls, metal plates, and cordless phones at least 100 mm (4 in.) away from the printer and your Wi-Fi router.

**I'd rather set up from a Windows computer**
Connect the printer with a USB cable and use the Network Setup Tool. See "Connecting to a Wireless Network" in the user's manual.

Next, start printing: see your Quick Start Guide or **capsuloffice.com/support**

**Everything you need, nothing you don't.**

© 2026 XSE Group, Inc. All rights reserved.